




Main Functions

1. Powerful function includes switching, dimming, blind, air conditioner, heating, self-defined scenery. It can be configured flexibly according project situations.
2. Every button provides 5 channels additional functions, such as time delay, circle, PWM, logic etc. These functions satisfy applications' complex requirements.
3. The devices every push button get LED indicator light and its color/turning on/off can be configured to show operation status of other devices on the KNX bus.
4. Deploying high contrast ratio customised LG screen, high accuracy and splendid image effect.
5. Carefully selected aluminum material and processed by CNC unibody craftwork, to achieve the maximum metal texture and art feeling.
6. Using top level high quality temperature and humidity sensor and European ST industrial level main chip to improve accuracy and capability, the life time has been increased 5 times.
7. Configured through standard ETS software directly and avoided errors from using other configuration software. Flexible and reliable functionality settings and Parameters control, satisfy the project design and integration.
8. Equipped with temperature and humidity detecting sensor and display screen, it can display current temperature and humidity and send control signal to the BUS.
9. Colour Option: Black (Abbreviation B) ; Silver (Abbreviation S) ;Gold (Abbreviation G) .

Technical Details

Power Supply	Bus voltage	21-30 DC from EIB	Installation	Method	Standard 80*80mm/ 86*86mm wall box
	Electric Current	< 12mA		Operating	-5°C...+45°C
	Bus low power	< 360mW		Storage	-25°C...+55°C
Connecting	EIB/KNX	Connection Terminal (Diameter 0.8mm ²)	Temperature Range		
			Colour	Golden G	Silvery S Black B


Product Size

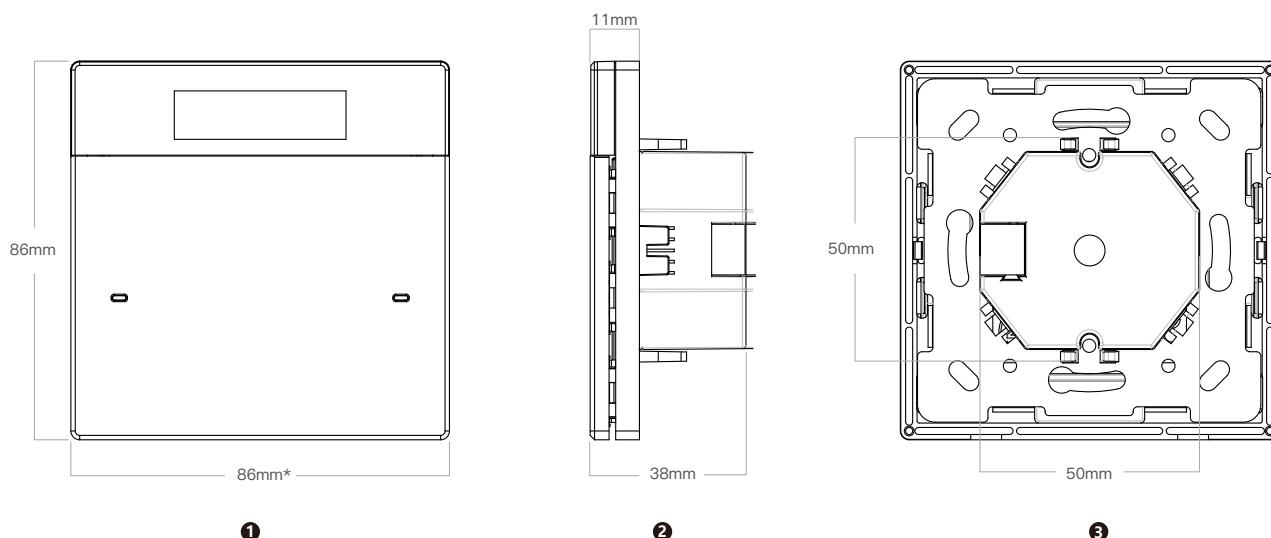

- ❶ Front view
- ❷ Side view
- ❸ Back view

Installation guide


1. Before installation, separate ③ the coupler's metal plate from ④ the switch panel (tips: push the plastic buckle when separating and pull out)
2. Rip away 5mm from the Twisted Pair cable and insert into KNX socket, and insert the KNX socket on the ③ the coupler.
3. Fix ③ the metal plate and coupler into the ② install box, adjust ③ the metal plate position. Using two M4*30 screws (please using enclosed screws because other screws maybe get higher caps) to fix the metal plate.
4. Push ④ the switch panel into ③ the metal plate for initial installation test. Design and debug the application after initial test installation to complete installation.

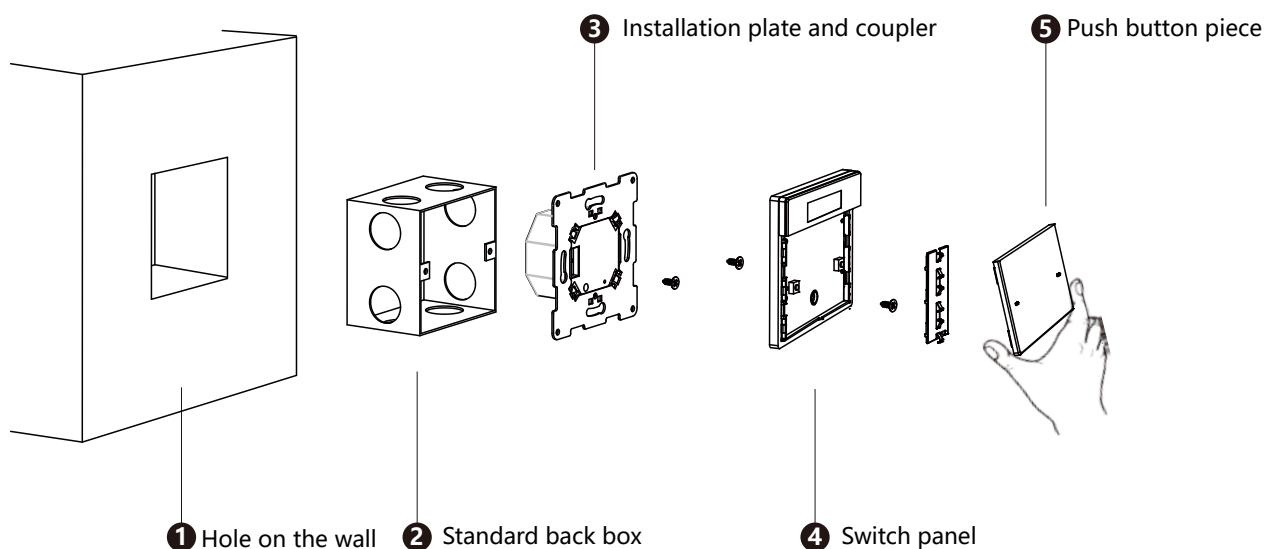

Note: If the switch panel need thief protection, please use anti-theft screw. The procedures are: using a slim plastic item to prize up the bush button from the side of the panel. Remove the stainless steel cover. Screw on a M3*8 round cap screw. Insert back the stainless cover and then push the button back.

Model Golden **G** Silvery **S** Black **B**

No frame models



C11-N-G
C11-N-B
C11-N-S

Important

- Installation and debugging can be only operated by qualified electrician. In the process of planning and implementation of electrical installation, the relevant standards, directives, regulations and instructions must be strictly enforced.
- To avoid the device being dirty and damaged during the process of transport, storage and using.
- Do not run the device beyond the specified technical standards (e.g. temperature range).
- When cleaning the device, only use dry cleaning cloth. Never use an alkaline agent or corrosive solvents.